



## Programming

- Individual abbreviated number** \*51\* (0-9) \* No. #  
Note! In Finland: (1-9)
- Erase one number** #51\* (0-9) #
- Erase all numbers** #51#


- Function key on Dialog 3210**  
 Number or code
- Function key on Dialog 3211, 3212, 3213**  
 Program Number or code Program

## Display Language\*


- Change** \*08\* Language code #
- |           |           |         |
|-----------|-----------|---------|
| 0 English | 3 Spanish | 6 ..... |
| 1 French  | 4 Italian | 7 ..... |
| 2 German  | 5 .....   | 8 ..... |
|           |           | 9 ..... |

## Adapting the Telephone





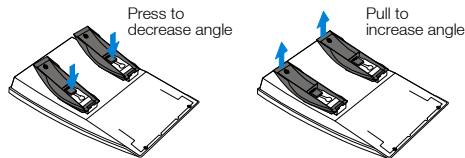


**Tilting display on Dialog 3212 and 3213**




**Tilting foot consoles**



## Symbol Explanations



- |   |   |
|---|---|
|  Lift the handset                         |  Replace the handset |
| <b>(0-9)</b> Press a wanted digit on the keypad   | <b>6</b> Press the key  |
| <b>Diversion</b> Pre-programmed key   | <b>2x DEF 3</b> Press repeatedly the key as many times as shown   |
|  Programmable key (name or function code) |  Extinguished lamp   |
|  Key below the display (Dialog 3213 only) |  Steady light        |
|   |  Flashing lamp       |
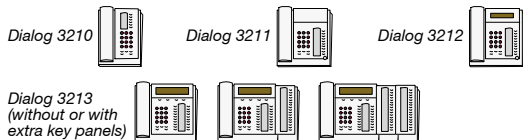
## Help for Telephone Type Identification




\*Optional \*\*Only available for newer software versions of the telephone


## Volume Control

- At idle or when ringing:**  
**Tone ringer volume** 
- During calls:**  
**Handset or loudspeaker volume** 







## Tone Ringer Character

- Select character for Dialog 3210**  
 (0-9)
- Select character for Dialog 3211, 3212, 3213**  
 Program (0-9) Program

## Ringing Options

- Program permanent options for Dialog 3210**  
 Access (0-6) Access
- Program permanent options for Dialog 3211, 3212, 3213**  
 Program Access (0-6) Access Program
- |                            |   |
|----------------------------|---|
| 0 No ringing               | 4 Delayed muted ringing                       |
| 1 Repeated ringing         | 5 Immediate speech connection, key controlled |
| 2 Delayed repeated ringing | 6 Immediate speech connection                 |
| 3 Muted ringing            |   |

**Temporary options\*\***  
**Silent ringing/Cancel**

-  /  or  / 
- Mute when ringing**  
 or 

## Lamp Indications

- Rapidly flashing lamp** Incoming call
- Slowly flashing lamp** The line is put on hold
- Light with short breaks** Ongoing call
- Steady light** The function is active or a supervised line is busy

# Dialog 3210, 3211, 3212, 3213

System Telephones for MD110

## Quick Reference Guide











## Free Seating\*

**Log on** \* 11 \* Individual auth. code \* Ext. #  
**Log off** # 11 #











## Answer Calls

**In general**   
**Handsfree**  or   
*(Dialog 3211, 3212, 3213 only)*  
**On another extension (Call pick-up)** Call the ringing extension **8** *Note! In France: 4 In Sweden: 6*






## Make Calls

**Ordinary calls** Dial number  
**Common abbreviated number** Dial abbreviated number  
**Individual abbreviated number** \* \* (0-9) *Note! In Finland: \* \* (1-9) In Sweden: (0-9) #*  
*David*   
**Dial by a function key**  
**Last external number redial** \* \* \* \* *Note! In Finland: \* \* \* 0 In Sweden: \* \* \* 0*  
**Dial by name\*** (example: Eva) *(Dialog 3213 only)*  
 2x **3**  3x **8**     
**Dial by Number log\*** *(Dialog 3213 only)*  
 Number log  






## During Connected Calls

**Switch to loudspeaker** *(Dialog 3211, 3212, 3213 only)*   
**Switch to handsfree** *(Dialog 3211, 3212, 3213 only)*    
**Switch to monitoring via loudspeaker** *(Dialog 3210 only)*    
**Switch to handset**   
**Mute/cancel**  /  or  /   
**Dialling** **9** Dial digits *Note! In Finland: 1*



## On Hold

**Individual**  
**Resume call**    
  
**Common** **8**  *Note! In France: 4 In Sweden: 6*  
**Resume call - own ext.**   
**Resume call - another extension** Call the extension where the call was put on hold **8** *Note! In France: 4 In Sweden: 6*


## Inquiry

**Ongoing conversation**  Call the 3rd party  
**Refer back**  or   
**Return to first party**  



## Transfer

**Ongoing conversation**  Call the 3rd party  *(Press before or after answer)*



## Conference

**Ongoing conversation**  Call the 3rd party **3** *(Press after answer)*

## When Busy Tone or No Answer

**Callback** **6**  *Note! In Finland: 5 In Sweden: 5*   
**Cancel individual Callback** # 37 \* Ext. #  
**Cancel all Callbacks** # 37 #  
**Activate Call waiting** **5** *(At busy tone)* Wait on the line *Note! In France: 6 In Finland: 6 In Sweden: 4*

## Call Forwarding

**Diversion**  or \* 21 #  
**Cancel**  or # 21 #  
**Diversion at no answer** \* 211 #  
**Cancel** # 211 #  
**Diversion at busy tone** \* 212 #  
**Cancel** # 212 #  
**Diversion bypass** \* 60 \* Ext. #  
**Follow-me**  
**Order from your own extension** \* 21 \* New ext. #  
**Cancel** # 21 #  
**Re-direct from answering extension** \* 21 \* Own ext. \* New ext. #  
**Cancel from answering extension** # 21 \* Own ext. #  
*Note! In U.K. for Follow-me: Dial 2 instead of 21!*  
**External follow-me** \* 22 # External code/No. #  
**Cancel** # 22 #  
**Personal number\***  
**Activate or change profile** \* 10 \* (1-5) #  
**Cancel** # 10 #

## General Cancellation

**Cancel all activated features** # 001 #



## Voice Mail\*

**Entering your mailbox:**  
**In general** Dial Voice Mail number Follow recorded instructions  
**New message received**  Follow recorded instructions

## Absence Information\*

**Activate** \* 23 \* Cause \* HHMM/MMDD #  
**Cancel** # 23 #

## Account Code\*

**New external call** \* 61 \* Account code # External code & No.  
**Ongoing external call**  \* 61 \* Account code #  *Note! In Finland and Norway: Dial 71 instead of 61!*

## Authorization Code\*

**Common code**  
**One single call** \* 72 \* Common code # External code & No.  
**Unlock for some calls** # 73 \* Common code #  
**Lock after some calls** \* 73 \* Common code #  
**Individual code**  
**Unlock your telephone** # 76 \* Individual code #  
**Lock your telephone** \* 76 \* Individual code #  
**Call from own telephone when locked** \* 75 \* Individual code # External code & No.  
**Assign another telephone** \* 75 \* Individual code \* Own ext. # External code & No.  
**Change code** \* 74 \* Old code \* New code #